


Kinross Re-Slating Works



Previous rectifying works had been carried out using poor quality slates which had insufficient fixings and detailing's at flashing to dormer windows and chimneys was poorly carried out.

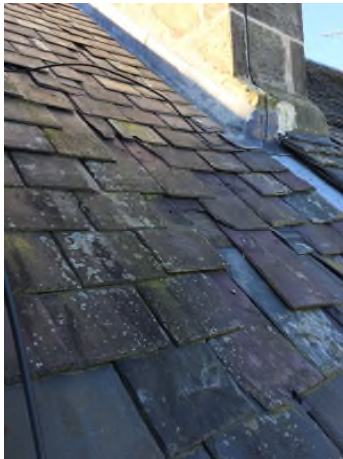

New slates where all double nailed with copper nails in accordance with BS:5534: 2014 standards.

Existing flashings had to be stripped out, New lead flashings where installed during re-roofing.

The lead flashings where installed to LSA guidelines.



After years of leaking the client is now delighted with a new watertight roof.